



The EN1501-XL pulse meter transmitter with extended life battery is a pulse counter with an extended battery life which can be used for general counting applications.

Product Features

- Compatible with virtually any pulse output device
- Long life battery reduces maintenance calls and lowers operating costs
- Includes case tamper protection

Product Specifications


Weight:	1.9 oz
Typical battery life:	Warrantied to 10 years
Internal battery type:	Panasonic BR-AG lithium battery (non-replaceable)
Accessories:	ACC501 transmitter mounting plate
Compatibility requirements:	A dry contact such as a reed switch
	The pulse width of a switch output when activated must be greater than or equal to 10ms
	The fastest pulse rate must be one pulse every four seconds
	Closed impedance of the pulser mechanism must be smaller than 1k ohm
	Open impedance of the pulser mechanism must be greater than 5 megaohms
Operating environment:	
Temperature:	32°F to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	60 minutes
Regulatory compliance:	FCC, RoHS

Mounting plate




The optional transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.

Inputs

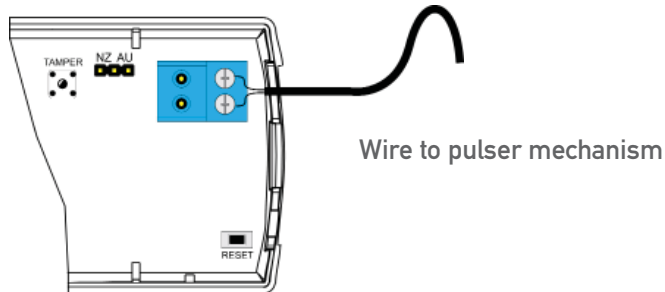

Dimensions

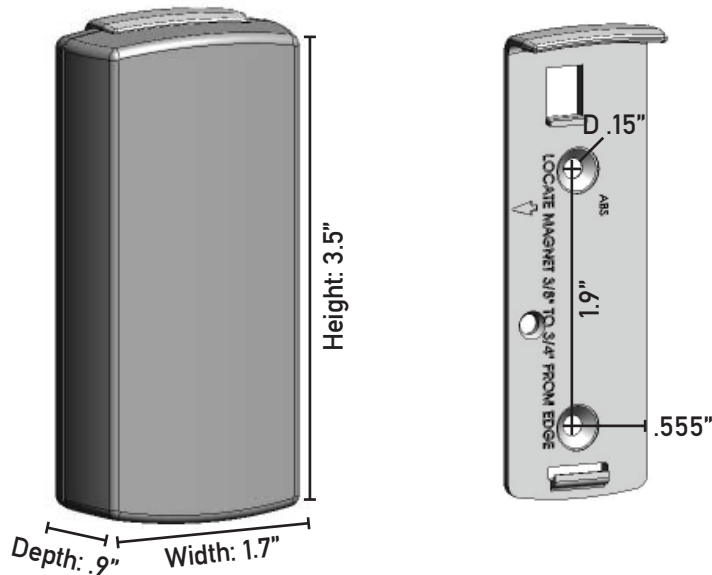

Reference Materials (available at www.inovonics.com)

EN1501/EN1501-XL EchoStream® TapWatch® Transmitter Installation and Operation Manual

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

