



EE1215 EchoStream® Single Input Universal Transmitter with Wall Tamper Installation Instructions

1 Overview

The EE1215 single input universal transmitter with wall tamper protection is designed for use with almost any standard contact or sensor. The transmitter is fully supervised and includes a wall tamper switch that notifies the system when the transmitter is removed from its mounted surface.

1.1 Inovonics Contact Information

▶ For product and installation videos visit us at www.inovonics.com/videos or use the QR code below.



If you have any problems with this procedure, contact Inovonics technical services:

- E-mail: support@inovonics.com.
- Phone: (800) 782-2709; (303) 939-9336.

1.2 EE1215 Internal Components

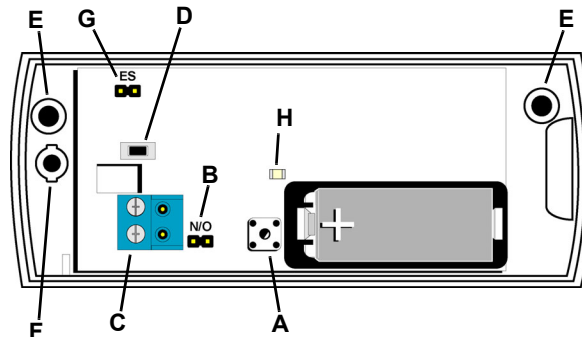


Figure 1 EE1215 components

- | | |
|--|------------------------|
| A Housing tamper button | B NO/NC selection pins |
| C Input terminal | D Reset button |
| E Wall-mount screw holes | F Housing screw hole |
| G EchoStream select compatibility selection pins | H Transmit LED |

1.3 What's In the Carton

- One 3.0V lithium battery, Inovonics part number BAT604.
- Two wall mount screws.
- Two wall mount anchors.
- Two selection jumpers.
- One housing closure screw.

2 Installation and Startup

2.1 Installation Notes

- These products are designed to be maintained by professional security technicians.
- Products are tested for indoor use.
- All products should be manually tested weekly.

2.2 Install the Battery

1. Pry the top lip of the mounting bracket up, and lift the bracket off of the transmitter.
2. Install the new battery.
3. Press the reset button.

2.3 Select Input Type

The NO/NC selection pins select a normally open (NO) or normally closed (NC) state for the contact circuit wired to the input terminal. If you are using the EE1215 set for normally open, you will need to configure the device; if you are using the EE1215 set for normally closed, skip to section 2.4, "Select the EchoStream Select Compatibility".

To configure the EE1215 for normally open:

4. Place a selection jumper on the NO/NC selection pins.
5. Press the reset button.

2.4 Select the EchoStream Select Compatibility

To meet ETSI requirements, Inovonics has developed a new line of EE 868MHz-only products. These new 868MHz-only products are compatible with older systems that include EchoStream select products. If you are using any ES products in your current system, you will need to enable EchoStream select compatibility on this new 868MHz-only product; if you are not using any EchoStream select products, skip to section 2.5, "Register the EE1215".

To enable compatibility with ES products:

6. Place a selection jumper on the enable EchoStream select compatibility selection pins.
7. Press the reset button.

2.5 Register the EE1215

Transmitters must be registered with the system in order to be monitored and supervised. When supervised, the transmitter will send a check-in message to the receiver. Transmitters using the 868MHz frequency range for Europe will send a check-in message every 12 minutes. Each transmitter has a unique factory-programmed identification number. Refer to the receiver installation instructions for details on registering a transmitter.

8. When prompted by the receiver to reset transmitter, press the reset button.
9. Test the transmitter and ensure appropriate response.

2.6 Mount the EE1215

10. Route the external wiring through the wall, as shown in Figure 2.




Figure 2 Mount the Transmitter to the Wall

11. Mount the transmitter to the wall using the wall-mount screw holes, ensuring the housing is flush against the wall and the wall tamper switch is firmly depressed.
12. Close the housing.
13. Secure the housing with the housing closure screw.

3 Specifications

External contacts: N/O or N/C.

Distance, external contact to transmitter: 3m (10 ft) maximum.

Power requirements: 3VDC, 60 mA.

Quiescent current: <10 uA.

Low battery detection: 2.4VDC.

Typical battery life: 3-5 years.

Battery type (BAT604): Panasonic CR123A or equivalent.

Tamper: Type B, fixed/mounted.

Operating environment: -10 to 60°C (14 to 140°F), up to 90% relative humidity noncondensing.

Dimensions: 10.5 x 4.5 x 2.3 cm (4.1 x 1.8 x 0.9").

Weight: 86g (3.0 ounces).

RF frequency range: 868-869 MHz.

Output power: 25mW.

Firmware revision: 90770, v3.2.

Countries in which Inovonics European products can be distributed: Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, United Kingdom.

Note: Specifications and data are subject to change without notice.

Note: Inovonics supports recycling and reuse whenever possible. Please recycle these parts using a certified electronics recycler.

Caution: Changes or modifications to this unit not expressly approved by Inovonics may void the installer's authority to operate the equipment as well as the product warranty.

4 Simplified Declaration of Conformity

Hereby, Inovonics declares that the radio equipment type EE1215 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following Internet address: www.inovonics.com.