



The Inovonics universal with wall tamper is designed for use with almost any standard contact or sensor. A 2.2K ohm end-of-line resistor is included with the transmitter and is required to operate it. The transmitter is fully supervised and includes a wall tamper switch that notifies the system when the transmitter is removed from its mounted surface.

Product Features

End of line resistor supervision

Screw closure housing and wall tamper switch proved additional security

Can be used with almost any standard NO/NC contact

UL listed

Product Specifications

| | |
|--|--|
| Dimensions: | 4.1" x 1.8" x 0.9" (10.4 x 4.6 x 2.3 cm) |
| Weight: | 3 oz. (85 g) |
| Typical battery life: | 3-5 years |
| Internal battery type: | Panasonic CR123A |
| External contacts: | Normally open or normally closed |
| External contact cabling requirements: | 14-22 gauge wire, unshielded |
| Distance, external contact to transmitter: | 10' (3 m) maximum |
| Operating environment: | |
| Temperature: | 32 to 140°F (0 to 60°C); 32 to 120°F (0 to 48°C) for UL installations |
| Humidity: | Up to 90% (non-condensing) |
| Market: | North America, Australia, New Zealand |
| EchoStream® frequency: | 902-928 MHz, frequency hopping spread spectrum |
| Check-in time frequency: | 3 minutes |
| Regulatory compliance: | FCC, ISED, RCM, RoHS, UL 365, UL 636, UL1023, UL 1076, UL 1610, ULC/ORD-C1023-74 |

Reference Materials (available at www.inovonics.com)

EN1215EOL Universal with Wall Tamper Installation Instructions


EchoStream Developer Guide

EchoStream One-Way Security Developer Guide


Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.
- Inovonics supports recycling and reuse whenever possible. Please recycle these parts using a certified electronics recycler.

Inputs

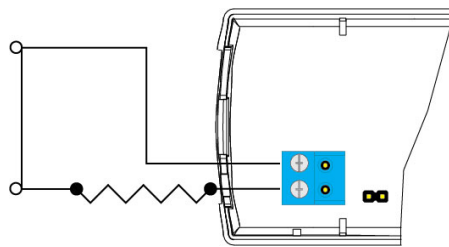

Normally closed

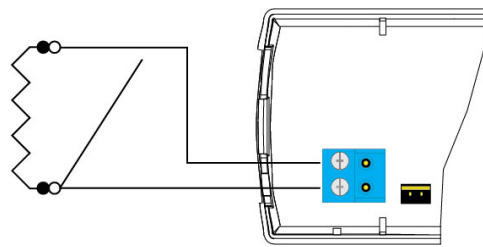

Normally open

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

