



# Labeling Guidance for UL 2560 Fundamental Devices

---

## Introduction

---

Partners that have achieved UL 2560 system certification will be required to apply a UL 2560 system certification mark/label to all Inovonics components which are designated as fundamental devices. In addition, you will be required to include information from the current Inovonics device label as indicated herein.




Your final label will be subject to UL approval as part of your certification process. Please work with your UL project engineer in order to ensure compliance with the standard.

## Current Product Labels and Required UL2560 Label Content

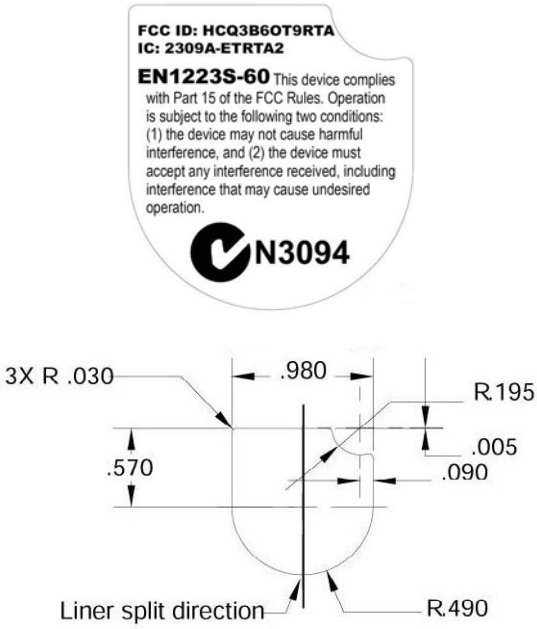
---

The chart below provides initial guidance as to the designated location and required content for the fundamental devices which are manufactured by Inovonics.



**Table 1: Current Labels and Required Label Content**

| Current Inovonics Device Label  | Partner UL 2560 System Certification Label   |   |
|---|--|---|
|   | Designated Location  | Required Content  |
|    | <p>External rear housing.</p> <p>Keep existing Inovonics label on device.</p> <p>Place your UL label adjacent to existing Inovonics label.</p> <p>Inovonics name and patent number(s) must remain visible.</p> | <p>Partner's name or registered symbol.</p> <p>Your model number, if different than Inovonics model number.</p> <p>Symbol 14 (Risk of Electric Shock).</p> <p>Per Guide Card, UL 2560 system certification mark with "Emergency Call System" called out (or use "EC" abbreviation if space constraints do not allow for full name).</p> |
|  | <p>External rear housing.</p> <p>Keep existing Inovonics label on device.</p> <p>Place your UL label adjacent to existing Inovonics label.</p> <p>Inovonics name must remain visible.</p>                      | <p>Partner's name or registered symbol.</p> <p>Your model number (if different than Inovonics model number).</p> <p>Per Guide Card, UL 2560 system certification mark with "Emergency Call System" called out (or use "EC" abbreviation if space constraints do not allow for full name).</p>   |
|  | <p>External rear housing.</p> <p>Keep existing Inovonics label on device.</p> <p>Place your UL label adjacent to existing Inovonics label.</p> <p>Inovonics name and patent number(s) must remain visible.</p> | <p>Partner's name or registered symbol.</p> <p>Your model number (if different than Inovonics model number).</p> <p>Per Guide Card, UL 2560 system certification mark with "Emergency Call System" called out (or use "EC" abbreviation if space constraints do not allow for full name).</p>   |

**Table 1: Current Labels and Required Label Content**

| Current Inovonics Device Label   | Partner UL 2560 System Certification Label  |  |
|--|---|--|
|  | Designated Location   | Required Content   |
|  <p>The image shows a current Inovonics device label and a technical diagram of the rear housing. The label is shield-shaped and contains the following text: <b>FCC ID: HCQ3B6OT9RTA</b>, <b>IC: 2309A-ETRTA2</b>, <b>EN1223S-60</b>, and a paragraph stating: "This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) the device may not cause harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation." Below the text is the C-TICK "N3094" symbol. The technical diagram shows a cross-section of the housing with dimensions: 3X R .030, .570, .980, R.195, .005, .090, R.490, and an arrow indicating the "Liner split direction".</p> | <p>External rear housing</p> <p>Remove and discard existing Inovonics label and replace with your UL 2560 label.*</p> | <p>Partner's name or registered symbol.</p> <p>EN1223S-60 or your own model number.</p> <p>Inovonics EN1223S FCC ID (see page 4).</p> <p>Inovonics EN1223S IC ID (see page 4).</p> <p>FCC Part 15 language (see page 5).</p> <p>Per Guide Card, UL 2560 system certification mark with "EC" abbreviation.</p> <p>The C-TICK "N3094" symbol for Australia/New Zealand is not required for your UL 2560 label.</p> <p>When you remove the existing EN1223S-60 label, you will see an embossed FA223S marking with FCC/IC information. For manufacturing reasons, these two devices used a common housing. The FA products are now obsolete. The FA marking will be removed from future production when appropriate cutover times are available. Your new UL label for this item will cover the FA information.</p> |

**Table 1: Current Labels and Required Label Content**

| Current Inovonics Device Label   | Partner UL 2560 System Certification Label |   |
|--|--|---|
|  | Designated Location                        | Required Content  |
| <br> | External housing of your wall plate.       | <p>Partner's name or registered symbol.</p> <p>Your own model number.</p> <p>"Contains RF Module".</p> <p>Inovonics FCC ID (see page 4).</p> <p>Inovonics IC ID (see page 4).</p> <p>FCC Part 15 Language (see page 5).</p> <p>Per Guide Card, UL 2560 system certification mark with "Emergency Call System" spelled out (or use "EC" abbreviation if space constraints do not allow for full name).</p> |

## Inovonics FCC/Industry Canada Information

**Table 2: Inovonics FCC/Industry Canada IDs**

| Product    | FCC ID Number | IC ID Number  | Where Used               |
|------------|---------------|---------------|--------------------------|
| EN6080     | HCQ3B6IX9NCU  | 2309A- IX9NCU | Existing Inovonics label |
| EN6040-T   | HCQ3B6OXNCU   | 2309A-OXNCU   | Existing Inovonics label |
| EN5040-20T | HCQ3B6OXNCU   | 2309A-OXNCU   | Existing Inovonics label |
| EN1223S-60 | HCQ3B6OT9RTA  | 2309A-ETR2A2  | Partner UL label         |
| EN1941-60  | HCQ3B6OT9OEM  | 2309A-OT9OEM  | Partner UL label         |
| EN1941XS   | HCQ3B6OT9OEM  | 2309A-OT9OEM  | Partner UL label         |

**Table 3: Inovonics FCC/Industry Canada Required Text**

| Item                                     | Text  | Where Used  |
|--|---|---|
| <b>FCC Part 15 Language (English)</b>    | This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) the device may not cause harmful interference, and 2) the device must accept any interference received, including interference that may cause undesired operation.   | EN6080 (existing Inovonics label).<br>EN6040-T (existing Inovonics label).<br>EN5040-20T (existing Inovonics label).<br>EN1223S-60 (Partner UL Label).<br>EN1941-60 (Partner UL Label).<br>EN1941XS (Partner UL Label). |
| <b>Industry Canada Language (French)</b> | Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. | EN6080 only (existing Inovonics label).   |