


Inovonics Wireless Solutions

Inovonics' line of EchoStream® wireless intrusion detection devices and mobile duress (panic) buttons are designed with today's applications in mind. Supporting installations with thousands of security devices across a campus, the EchoStream family of pendant transmitters, universal transmitters, motion detectors and add-on receivers can connect to virtually any security system.

Unique to Inovonics is the high power repeater mesh that intelligently amplifies transmissions from EchoStream transmitters. Providing coverage in all types of building construction, thus eliminating the need for labor associated with wired installs. EchoStream provides the flexibility to cover small, medium and large commercial buildings as well as complete campuses.

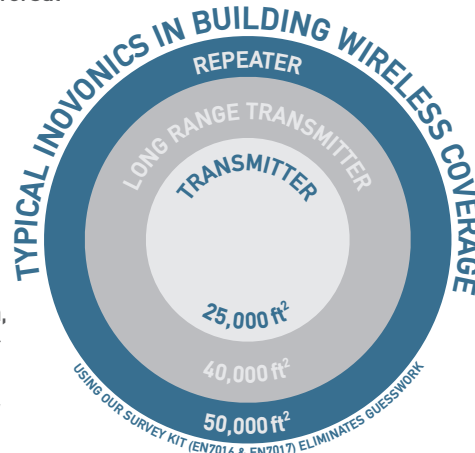

ENKIT-SDI2

- UL and CSFM listed
- Includes B820 direct connection interface board and EN4200 receiver
 - The B820 mounts inside the EN4200 housing, no separate enclosure required
- May be installed up to 1000 feet from panel for optimal reception
- Capacity to store up to eight repeater ID's
 - For systems with more than 8 repeaters, use the ENKIT-01 on the ZONEX bus
- Compatible with control panels employing the Bosch SDI2 communications device bus including all versions of the D9412GV4, D7412GV4 and D7212GV4, as well as the B3512, B4512, B5512, B6512, B8512G and B9512G

ENKIT-01 (GV3 and Older Systems)

- Internal interface keypad with diagnostic functions
- Compatible with G series panels
 - D9412GV3, D9412GV2 and D9412 v6.30 or higher
 - D7412GV3, D7412GV2 and D7412 v6.30 or higher
 - D7212GV3, D7212GV2 and D7212 v6.41 or higher

Panel Interface Options

BOSCH® - EN4200		
D7212G - 32 pts.	D7412G - 67 pts.	D9412G - 238* pts.
B3512 - 8 pts.	B4512 - 20 pts.	B5512 - 40 pts.
B6512 - 88 pts.	B8512G - 91 pts.	B9512G - 350 pts.


Security System Configuration



Security Panel



Panel Interface / Receiver



Repeater Network*



Wireless Transmitters

-  = Wired Connection
-  = Wireless Connection

Water Resistant Pendant Transmitters

Compact single or double button pendant that can be supervised. LED flashes when transmitting. Ideal for healthcare applications.

Single Button **EN1223S**

Double Button **EN1223D**

Wristband **ACC623**



Necklace Pendant Transmitters

Sleek single or double button pendant that can be supervised. LED flashes when transmitting. Easy to wear with included necklace.

Single Button **EN1233S**

Double Button **EN1233D**



Belt Clip Pendant Transmitters

Sleek single or double button pendant that can be supervised. LED flashes when transmitting. Durable belt clip included.

Single Button **EN1235S**

Double Button **EN1235D**



Fixed Position Hold Up Pendant Transmitters

Fixed position transmitters include mounting hardware for easy installation and back tamper for removal alarms.

Single Button **EN1235SF**


Double Button **EN1235DF**



Four Condition Pendant Transmitters

Only on/off conditions will function with the **ENKIT-01** and **ENKIT-SDI2** after additional programming.


Four Condition On/Off **EN1224-ON***



Universal Transmitters

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch.

Universal Transmitter **EN1210**
With EOL Resistor **EN1210EOL**
Door/Window Transmitter with Reed Switch **EN1210W**



Universal Transmitters with Wall Tamper

Wall tamper switch adds protection from device removal.

Universal Transmitter with Wall Tamper **EN1215EOL**
With Reed Switch and Magnet **EN1215WEOL**



Long Range Transmitter

The Long Range universal transmitter can be used with any standard N/O or N/C sensor. Second alarm condition is not recommended with **ENKIT-01** or **ENKIT-SDI2**.

Long Range **EN1252**



Smoke Detector

The **EN1244** features an onboard sounder, an LED indicator, tamper, EchoStream® network supervision, and local test capability.



Wireless CO Detector

The **EN1245** features an onboard sounder, a CO sensor, LED indicators and local test capability to allow the user total visibility of its functionality.



Billtrap Transmitter

The **EN1249** provides the flexibility for use in cash drawers for use in any financial or retail environment. Features case and back tamper, Smart Baiting with LED confirmation, and two or ten second delay transmission modes.



Glassbreak Detector

The **EN1247** uses acoustic pattern recognition technology for proven performance, extended range, and increased immunity to false alarms. 20ft radius allows for multiple window coverage.



Water Detector

The **EN1751** water detector provides early warning against damage caused by leaking appliances and standing water when used with the Honeywell® FP280 probe.


Probe sold separately.



Temperature Detector

The **EN1752** temperature detector enables programmable temperature threshold alarming for ambient temperatures and external monitoring when used with the Honeywell® T280R temperature probe.


Probe sold separately.



360° Ceiling Mount Motion Detector

The **EN1265** four element motion detector offers a 360° coverage pattern, case tamper switch, and up to an 18ft mounting height with the included lens.


High Ceiling Lens (25ft) **ACC669**



360° Ceiling Mount Motion Detector Coverage

Top View: 65.6ft. diameter coverage area.

Side View: 32.8ft. height.



Motion Detector with Pet Immunity


The **EN1262** is designed for low traffic applications and features pet immunity to reduce false alarms from animals. Includes a case tamper switch and optional wall tamper.



Motion Detector with Pet Immunity Coverage

Top View: 20ft. x 40ft. coverage area.

Side View: 10ft. height.



High Traffic Four Element Motion Detector

The **EN1261HT** is developed specifically for high traffic environments, delivering approximately four years of battery life. Includes case and back tamper, and features pet immunity up to 33lbs/lft.


Long Range Lens (60ft) **ACC668**



High Traffic Four Element Motion Detector Coverage

Top View: 50ft. x 50ft. coverage area.

Side View: 7.9ft. height.




Wall Mount Motion Detector

The **EN1260** features digital signal processing that recognizes human signatures to reduce false alarms.

Curtain Lens Kit **ACC672CT**

Long Range Lens Kit (99ft) Kit (99ft) **ACC672LR**


Pet Alley Lens Kit **ACC672PA**



Wall Mount Motion Detector Coverage

Top View: 50ft. x 50ft. coverage area.


Side View: 6.4ft. height.



Add-On Receivers

Add-on receivers cost effectively add EchoStream wireless transmitters to any installation. Includes form C relays with dedicated alarm and fault output. The **EN4216MR** and **EN4232MR** are UL listed, support multi-condition transmitters, and include event logging.


Receiver	Transmitters	Outputs
EN4204R	4	4 Alarm / 1 Fault
EN4216MR	16	5 Alarm / 1 Fault
EN4232MR	32	11 Alarm / 1 Fault



Security Only Serial Receiver

The **EN4200** allows for connection to G series control panels. Available through Bosch as **ENKIT-SDI2** (GV4 systems) or **ENKIT-01** (GV3 and older systems) and include both the **EN4200** and interface module.

Panel integration list on front.



High Power Repeater

The high power repeater amplifies transmissions from any transmitter.

High Power Repeater with Transformer **EN5040-T**, Without Transformer **EN5040**

Weatherproof Enclosure **ACC650**



Wireless Survey Kit


The **EN7016** wireless survey kit is a portable and easy to use tool for determining the optimal location for transmitters and repeaters. This reduces bid risk, decreases installation time, and builds credibility with clients. Includes both **EN1223SK** and **EN1210SK**



Survey Kit & App

The **EN7017** survey kit and app reduces bid risk, decreases installation time, and builds credibility with clients. Quickly prepare accurate quotes for even the most complex jobs.

Mobile app available on Android and iOS devices.



GET IT ON **Google Play** | Download on the **App Store**

* EN1224-ON compatible with ENKIT-01 and ENKIT-SDI2 systems for on/off button functions only.
The range and performance of any wireless product depends on the structure and environment in which it operates. Continual enhancements to our products may cause specifications to change without notice. Visit our website for UL information.
Phone: 303.939.9336 • Toll-Free: 800.782.2709 • Fax: 303.939.8977 • E-Mail: sales@inovonics.com