



The EE4080 IP gateway combines the functionality of an Inovonics EE4000 receiver with the flexibility of an IP appliance. With a message queuing telemetry transport (MQTT) license, the IP gateway outputs messages in the MQTT protocol. With a BACnet/IP license, the IP gateway outputs messages in the BACnet/IP protocol.

### Product Features

Optional Power over Ethernet (PoE) feature

Supports over-the-air updates

MQTT license compatible with all Inovonics transmitters; BACnet license compatible with Inovonics environmental, pulse counting and select security transmitters.


External LEDs indicate power, IP connectivity and message receipt

### TapWatch Gateway Specifications

Weight:	554 g
Dimensions:	243 mm x 169 mm x 31 mm
Power requirement:	Line power: A 12-14V AC intrinsically safe power supply capable of supplying at least 20VA, or a 12-15V DC power supply capable of supplying at least 20VA; POE: IEEE 802.3af-2003 compliant
Router requirements:	The router must assign addresses via DHCP; the DHCP lease of the router must be set to a non-zero and non-infinite value, and should be set to a value greater than 30 seconds; The router must allow outbound connections on the following ports: DNS (53), HTTPS (443), NTP (123)
Connectivity:	Ethernet: 10/100Base-T, DHCP, static IP; WiFi: 802.11b/g/n, 2.4GHz, WPA/2-Personal, DHCP, static IP
Storage capacity:	Messages for 150 transmitters for 30 days, reporting in at 15 minute intervals, or equivalent
Operating environment:	
Temperature:	0° - 60°C
Humidity:	Up to 90% (non-condensing)
Market:	Europe
EchoStream® frequency:	868-869 MHz
Regulatory compliance:	CE, RoHS

## Inputs

---

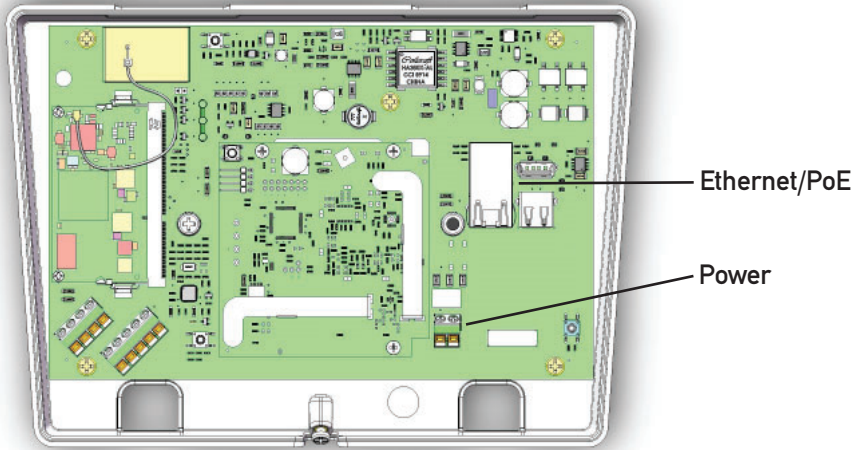

### Reference Materials (available at [www.inovonics.com](http://www.inovonics.com))

---

EE4080 IP Gateway Installation Instructions

---

E\*4080 IP Gateway Amazon Web Services MQTT Quick Start Tech Note

---

E\*4080 IP Gateway BACnet/IP Quick Start Tech Note

---

Inovonics Product Catalog: Europe

---

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.

### Technical documents

---

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

