

**EN1215E0L Single Input Universal Transmitter with Wall Tamper and EOL Protection**


The Inovonics single input universal transmitter with wall tamper and EOL protection is designed for use with almost any standard contact or sensor. A 2.2K ohm end-of-line resistor is included with the transmitter and is required to operate it. The transmitter is fully supervised and includes a wall tamper switch that notifies the system when the transmitter is removed from its mounted surface.

**Product Features**


---

End-of-line resistor supervision

---

Screw closure housing and wall tamper switch proved additional security

---

Can be used with almost any standard NO/NC contact

---

UL listed

**Product Specifications**


---

Weight: 3 oz

---

Typical battery life: 3 – 5 years

---

Internal battery type: Panasonic CR123A

---

External contacts: Normally open or normally closed

---

External contact cabling requirements: 14 - 22 gauge wire, unshielded, 10 foot maximum length

---

Distance, external contact to transmitter: 10 feet maximum

---

Operating environment:

---

Temperature: 32 to 140°F; 32 to 120°F for UL installations

---

Humidity: Up to 90% (non-condensing)

---

Market: North America, Australia, New Zealand

---

EchoStream® frequency: 902-928 MHz, frequency hopping spread spectrum

---


Check-in time frequency: 3 minutes

---


Regulatory compliance: FCC, RoHS, Industry Canada, UL 365, UL 636, UL 1076, UL 1610, ULC /ORD-C634-86, ULC/ORD-C1023-74

---

## Inputs

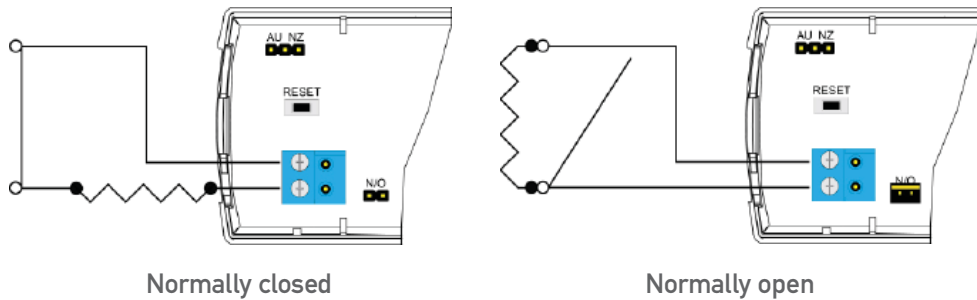

## Dimensions

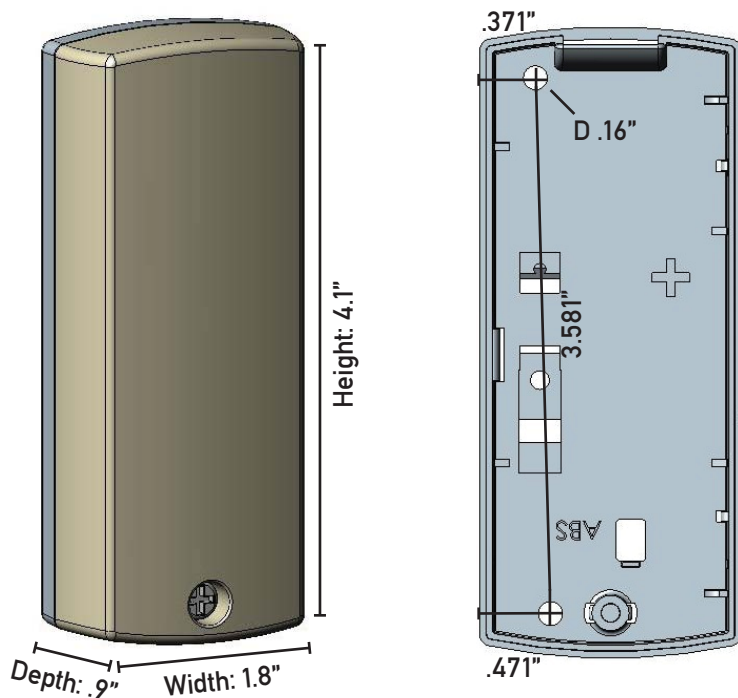

## Reference Materials (available at [www.inovonics.com](http://www.inovonics.com))

EN1215EOL Universal Transmitter with Wall Tamper Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

## Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

