



The Inovonics single input universal transmitter with EOL protection is a universal transmitter with an end of line resistor. The included 2.2k ohm resistor is required to operate the EN1210EOL.

Product Features

- End of line resistor supervision
- Mounting bracket included for quick and easy installation
- Can be used with almost any standard NO/NC contact
- Includes case tamper protection

Product Specifications


Weight:	1.9 oz
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
Accessories:	ACC1210-10, EN1210/EN1212 white housing 10 pack, ACC1210B-10 EN1210/EN1212 brown housing 10 pack
External contacts:	Normally open or normally closed
External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
Distance, external contact to transmitter:	10 feet maximum
Operating environment:	
Temperature:	-4 to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	3 minutes
Regulatory compliance:	FCC, RoHS, Industry Canada

Mounting plate




The transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.

Inputs

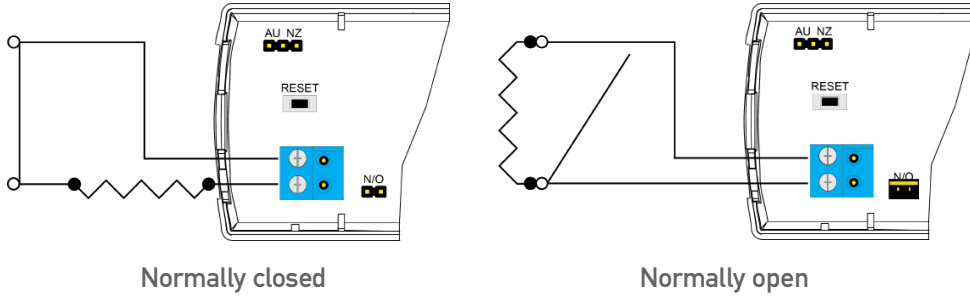

Dimensions

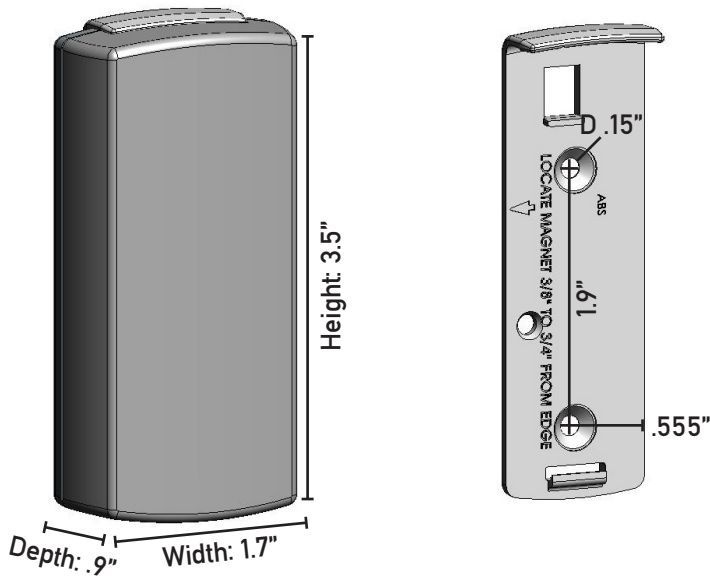

Reference Materials (available at www.inovonics.com)

EN1210EOL EchoStream Single Input Universal Transmitter with EOL Protection
Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

