



The Inovonics dual input universal transmitter is designed for use with any standard contact or sensor that provides a contact closure. The primary alarm input is selectable – normally open or closed – and the secondary alarm input is set to normally closed only.

Product Features

- Supports dual inputs
- Can be used with almost any standard NO/NC contact
- Fully supervised
- Includes case tamper protection


Product Specifications

Weight:	1.9 oz
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
Accessories:	ACC1210-10, EN1210/EN1212 white housing 10 pack, ACC1210B-10 EN1210/EN1212 brown housing 10 pack
External contacts:	Input one can be normally open or normally closed; input two is always normally closed
External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
Distance, external contact to transmitter:	10 feet maximum
Operating environment:	
Temperature:	-4 to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	3 minutes
Regulatory compliance:	FCC, RoHS, Industry Canada


Mounting plate


The transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.

Inputs

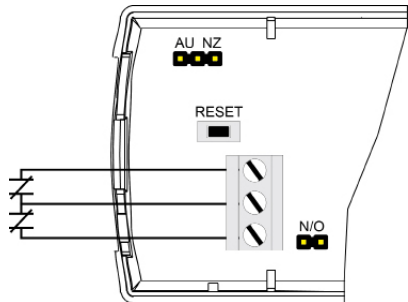


Both inputs normally closed

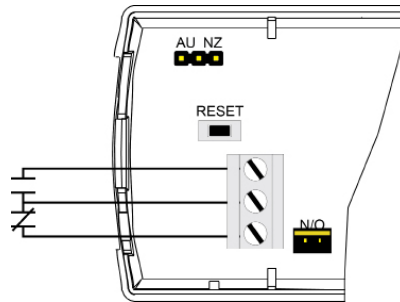

Input one normally open

Dimensions

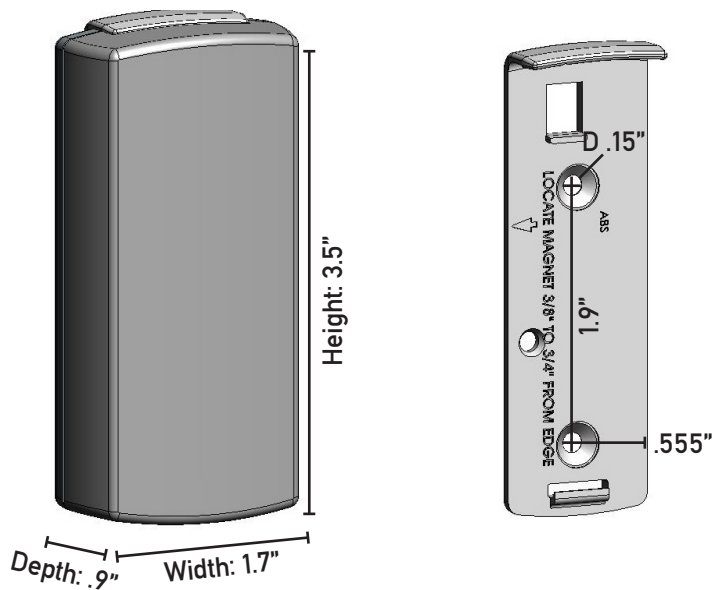

Reference Materials (available at www.inovonics.com)

EN1212 EchoStream Universal Transmitter Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

