



The Inovonics single input universal transmitter with wall tamper and EOL protection is designed for use with almost any standard contact or sensor. A 2.2K ohm end-of-line resistor is included with the transmitter and is required to operate it. The transmitter is fully supervised and includes a wall tamper switch that notifies the system when the transmitter is removed from its mounted surface.


Product Features

- End-of-line resistor supervision
- Screw closure housing and wall tamper switch proved additional security
- Can be used with almost any standard NO/NC contact
- UL listed


Product Specifications

Weight:	3 oz
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
External contacts:	Normally open or normally closed
External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
Distance, external contact to transmitter:	10 feet maximum
Operating environment:	
Temperature:	32 to 140°F; 32 to 120°F for UL installations
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	3 minutes
Regulatory compliance:	FCC, RoHS, Industry Canada, UL 365, UL 636, UL 1076, UL 1610, ULC /ORD-C634-86, ULC/ORD-C1023-74

Inputs

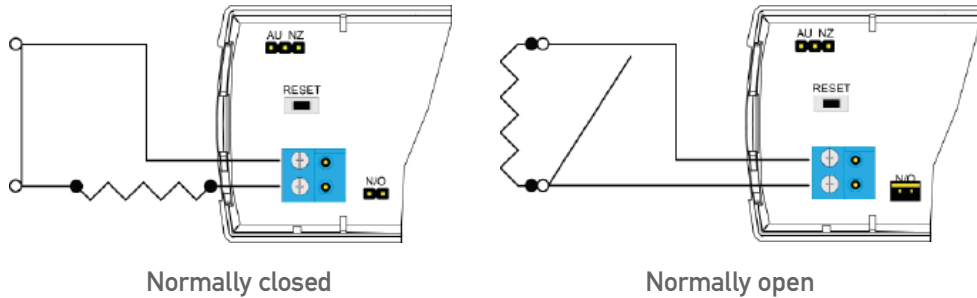

Dimensions

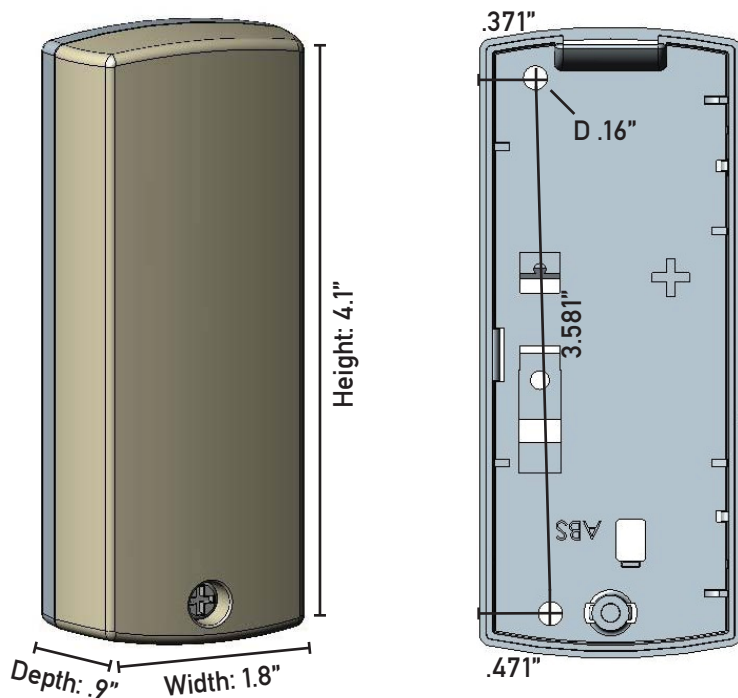

Reference Materials (available at www.inovonics.com)

EN1215EOL Universal Transmitter with Wall Tamper Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

