


## Inovonics Wireless Solutions

Inovonics' line of EchoStream® wireless intrusion detection devices and mobile duress (panic) buttons are designed with today's applications in mind. Supporting installations with thousands of security devices across a campus, the EchoStream family of pendant transmitters, universal transmitters, motion detectors and add-on receivers can connect to virtually any security system.

Unique to Inovonics is the high power repeater mesh that intelligently amplifies transmissions from EchoStream transmitters. Providing coverage in all types of building construction, thus eliminating the need for labor associated with wired installs. EchoStream provides the flexibility to cover small, medium and large commercial buildings as well as complete campuses.

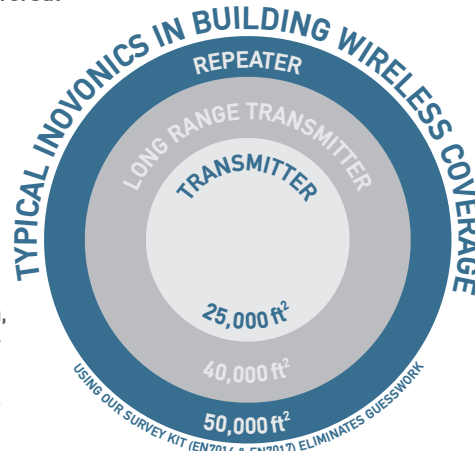

## Security System Configuration



**Security Panel**



**Add On or Serial Receiver**



**Repeater Network\***



**Wireless Transmitters**

### ENKIT-SDI2

- UL and CSFM listed
- Includes B820 direct connection interface board and EN4200 receiver
  - The B820 mounts inside the EN4200 housing, no separate enclosure required
- May be installed up to 1000 feet from panel for optimal reception
- Capacity to store up to eight repeater ID's
  - For systems with more than 8 repeaters, use the ENKIT-01 on the ZONEX bus
- Compatible with control panels employing the Bosch SDI2 communications device bus including all versions of the D9412GV4, D7412GV4 and D7212GV4, as well as the B3512, B4512, B5512, B6512, B8512G and B9512G

### ENKIT-01 (GV3 and Older Systems)

- Internal interface keypad with diagnostic functions
- Compatible with G series panels
  - D9412GV3, D9412GV2 and D9412 v6.30 or higher
  - D7412GV3, D7412GV2 and D7412 v6.30 or higher
  - D7212GV3, D7212GV2 and D7212 v6.41 or higher

### Panel Interface Options

BOSCH® - EN4200		
D7212G - 32 pts.	B4512 - 20 pts.	B5512 - 40 pts.
B3512 - 8 pts.	B8512G - 91 pts.	
B6512 - 88 pts.	B9512G - 350 pts.	

 = Wired Connection

 = Wireless Connection

**Water Resistant Pendant Transmitters**

Compact single or double button pendant that can be supervised. LED flashes when transmitting. Ideal for healthcare applications.

Single Button **EN1223S**

Double Button **EN1223D** 

Wristband **ACC623**




**Necklace Pendant Transmitters**

Sleek single or double button pendant that can be supervised. LED flashes when transmitting. Easy to wear with included necklace.

Single Button **EN1233S**

Double Button **EN1233D**



**Belt Clip Pendant Transmitters**

Sleek single or double button pendant that can be supervised. LED flashes when transmitting. Durable belt clip included.

Single Button **EN1235S**

Double Button **EN1235D**



**Fixed Position Hold Up Pendant Transmitters**

Fixed position transmitters include mounting hardware for easy installation and back tamper for clip removal alarms

Single Button **EN1235SF**

Double Button **EN1235DF**






**Four Condition Pendant Transmitters**

Multiple condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality

Four Condition **EN1224**

Four Condition On/Off **EN1224-ON**




**Multi Condition Pendant Transmitters**

Multiple condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality.

Three Condition **EN1236D**

Two Condition **EN1238D**




**Universal Transmitters**

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch.

Universal Transmitter **EN1210**

With EOL Resistor **EN1210EOL**

Door/Window Transmitter with Reed Switch **EN1210W**



**Universal Transmitters with Wall Tamper**

Wall tamper switch adds protection from device removal.

Universal Transmitter with Wall Tamper **EN1215EOL**

With Reed Switch and Magnet **EN1215WEOL**






**Dual Input Universal Transmitter**

Dual input universal transmitters can be used with any standard N/O or N/C sensor and include an additional N/C input.

Dual Input Universal Transmitter **EN1212**

With Wall Tamper **EN1216**

Long Range **EN1252**



**Smoke Detector**

The **EN1244** features an onboard sounder, an LED indicator, tamper, EchoStream<sup>®</sup> network supervision, and local test capability.





**Wireless CO Detector**


The **EN1245** features an onboard sounder, a CO sensor, LED indicators and local test capability to allow the user total visibility of its functionality.





**Billtrap Transmitter**

The **EN1249** provides the flexibility for use in cash drawers for use in any financial or retail environment. Features case and back tamper, Smart Baiting with LED confirmation, and two or ten second delay transmission modes.



**Glassbreak Detector**


The **EN1247** uses acoustic pattern recognition technology for proven performance, extended range, and increased immunity to false alarms. 20ft radius allows for multiple window coverage.



**Glassbreak Detector**

The **EN1248** glassbreak detector is a wireless omnidirectional glassbreak detector, providing detection coverage of 180°.

This is a direct replacement of the EN1247.



**Wall Mount Motion Detector**

The **EN1260** features digital signal processing that recognizes human signatures to reduce false alarms.

Curtain Lens Kit **ACC672CT**

Long Range Lens Kit (99ft) **ACC672LR**


Pet Alley Lens Kit **ACC672PA**



**360° Ceiling Mount Motion Detector**

The **EN1265** four element motion detector offers a 360° coverage pattern, case tamper switch, and up to an 18ft mounting height with the included lens.


High Ceiling Lens (25ft) **ACC669**



**360° Ceiling Mount Motion Detector**

The **EN1266** 360° ceiling mount motion detector is a four element passive infrared intrusion detector for use in electronic security systems in ceiling mount applications.

This is a direct replacement for the EN1265.



**Motion Detector with Pet Immunity**


The **EN1262** is designed for low traffic applications and features pet immunity to reduce false alarms from animals. Includes a case tamper switch and optional wall tamper.



**Wall Mount Motion Detector with Pet Immunity**

The **EN1263** motion detector with pet immunity is an advanced, fully supervised low-current wireless motion detector with the most advanced optics detection method for reliable system operation.

This is a direct replacement for the EN1260/EN1262.



**High Traffic Four Element Motion Detector**

The **EN1261HT** is developed specifically for high-traffic environments delivering approximately four years of battery life. Includes case and back tamper, and features pet immunity up to 33lbs/1ft

Long Range Lens (60ft) **ACC668**






**Water Detector**

The **EN1751** water detector provides early warning against damage caused by leaking appliances and standing water when used with the Honeywell<sup>®</sup> FP280 or Flair Electronics<sup>®</sup> 1010-H2OS36-EN1751


Probes sold separately.



**Temperature Detector**

The **EN1752** temperature detector enables programmable temperature threshold alarming for ambient temperatures and external monitoring when used with the Honeywell<sup>®</sup> T280R temperature probe.


Probe sold separately.



**Serial Receivers - Direct to Panel Integration**

Serial receivers integrate directly to partner panels used in commercial access control/intrusion. These integrations leverage programming and wiring familiarity to expedite inclusion, or expansion, of wireless end points.

Panel integration list on front



**High Power Repeater**

The high power repeater amplifies transmissions from any transmitter.

High Power Repeater with Transformer **EN5040-T** 

Without Transformer **EN5040**

Weatherproof Enclosure **ACC650**




**IP Gateway (requires an IP gateway license)**

The **EN4080** IP gateway combines EN4000 receiver and third party IP gateway functionality into a single product.




**LICBACNET**  
Enables output EchoStream messages into BACnet/IP systems


**LICMQTT**  
Enables output EchoStream messages into MQTT-based Amazon Web Services applications



**Add-On Receivers**

Add-on receivers cost effectively add EchoStream wireless transmitters to any installation. Includes form C relays with dedicated alarm and fault output. The **EN4216MR** and **EN4232MR** are UL listed, support multi-condition transmitters, and include event logging.

Receiver	Transmitters	Outputs
<b>EN4204R</b>	 4	4 Alarm / 1 Fault
<b>EN4216MR</b>	 16	5 Alarm / 1 Fault
<b>EN4232MR</b>	 32	11 Alarm / 1 Fault



\* EN1224-ON compatible with ENKIT-01 and ENKIT-SDI2 systems for on/off button functions only.

The range and performance of any wireless product depends on the structure and environment in which it operates. Continual enhancements to our products may cause specifications to change without notice. Visit our website for UL information.