

Senior Living

Your Wireless Emergency Call Infrastructure Partner

For nearly 20 years, Inovonics has provided the best-selling wireless pendants and network infrastructure to help e-call system providers deliver effective and innovative solutions for Senior Living communities.

Our proven, UL 2560 certified EchoStream® network is reliable, flexible and scalable, providing complete campus coverage, enhancing resident satisfaction, improving staff productivity and ensuring that your e-call system provides timely responses to resident needs across an entire campus.






Collaboration That Delivers Results

As partners, we collaborate in the delivery of an effective wireless e-call system that enhances resident safety and satisfaction and improves staff productivity.

- Inovonics provides network infrastructure that delivers alarm and other event information to your application software.
- You design, integrate, install and support the e-call system which intelligently interprets wireless alerts and notifies staff, helping to ensure a timely response.



Inovonics Wireless E-Call Infrastructure Benefits

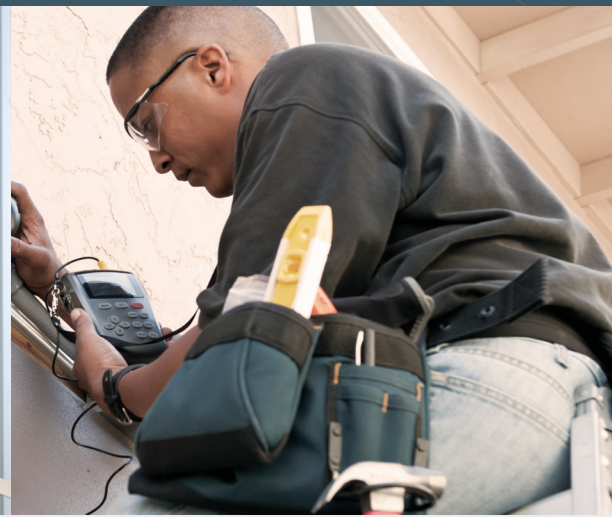

Community Operator Benefits

UL 2560 Certification

Inovonics UL 2560* component certification ensures:

- 99.99% alarm message delivery**.
- Timely identification of missing devices.
- Reliable device performance: tested for water exposure, impact, drop and durability.

Faster Alarm Response Times

Knowing the location of an alarm can help reduce caregiver response times

- The EN6080 area control gateway offers an on-board algorithm that sends area level alarm location information to the application software over an IP connection.
- E-call providers can develop their own alarm location algorithms using serial data sent through the EN6040 network coordinator.

E-Call Provider Benefits

System Reliability

- Patented EchoStream technology avoids RF interference obstacles inherent to commercial properties.
- Our secure and dedicated network is removed from common faults and down times associated with shared wireless networks.

Scalability and Flexibility

EchoStream wireless technology is flexible and scalable to cover large multi-building campuses. Simply add transmitters and repeaters as needed to extend coverage to parking facilities, court yards, walking trails, etc.

Installer Benefits

Simplicity

Wireless technology reduces set-up time compared to wired solutions.

Ease of Maintenance

Proven performance means less system maintenance and fewer service calls.

World Class Technical Support

Free, unlimited access to our experienced Inovonics technical services team for integration, ongoing support and troubleshooting.

**E-call system providers must achieve system certification from a nationally recognized testing laboratory to claim compliance with UL 2560, The Standard for Safety for Assisted Living and Independent Living Facilities. Applicable to the United States and Canada only.*

***Requires the use of repeaters with check-in times of 20 minutes and transmitters with check-in times of ≥ 60 minutes.*

UL 2560 Certified Fundamental Devices

Part of the minimum fundamental configuration of a UL 2560 emergency call system* as defined in the standard

Network Coordinator

The **EN6040-T** network coordinator manages signals between end devices, repeaters and the application controller in EchoStream directed network systems.



High Power Repeater

The high power repeater **EN5040** amplifies transmissions from any transmitter. Multiple repeaters can be used to provide campuswide coverage.

Weatherproof Enclosure
ACC650



One-Way RF Modules

The **EN1941-60** one-way binary RF module integrates into pullcord stations allowing them to send wireless signals through the network.

One-Way Binary
EN1941-60

One-Way Serial Data
EN1941XS



Waterproof Pendant with Wristband

Water-resistant pendant with single button press and hold activation. Includes plastic neck chain and belt clip.

Single Button
EN1223S-60

Wrist straps
ACC623S - Small
ACC623L - Large



Waterproof Pendant with Lanyard

Small, light and waterproof. Bright lights for alarm activation, alarm clearance and low battery. Vibrates to confirm alarm activation. Includes adjustable lanyard with breakaway feature.

Neck Lanyard Pendant
EN1221S-60N



Waterproof Pendant with Wristband

Small, light and waterproof. Bright lights for alarm activation, alarm clearance and low battery. Vibrates to confirm alarm activation. Includes 6mm silicone wristband with adjustable buckle closure.

Wristband Pendant
EN1221S-60W

Long Wristband Pendant
EN1221S-60WLB (Bulk Only)



Location Pendant with Lanyard

Small, light and comfortable to wear, and includes a Bluetooth® radio that enable advanced locating features.

Location Pendant
EN2221S-60

Replacement Wristband
ACC682-BU



Fall Detection Pendant with Lanyard

The fall detection pendant sends an automatic alarm message when sensors indicate that a resident may have fallen, even if the resident is unable to press the alarm button.

Fall Detection Pendant
EN2222S-60

Replacement Lanyard
ACC681-BU



UL 2560 Supplemental Devices

May be included in the emergency call system, but do not affect the fundamental operation of the system

Single Input Universal

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch. One hour and four hour check-in interval versions are available

Universal Transmitter
EN1210-60

Universal Transmitter
EN1210-240



Universal Transmitter with Reed Switch

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch. The **EN1210W-60** is designed for door/window use and requires use of included magnet.



Dual Input Universal

Dual input universal transmitters can be used with any standard N/O or N/C sensor and include an additional N/C input.

Dual Input Universal
EN1212-60



Activity Sensor

The **EN1241-60** activity sensor is designed specifically for residential and senior living environments where a notification of daily activity is necessary.

Selectable fixed sleep intervals of two, four, or six hours are used to minimize wireless traffic in large installations, while confirming daily resident activity.



Activity Monitoring Detector

The **EN1342-60** activity monitoring detector is designed specifically for residential and senior living environments where a notification of daily activity is necessary.

This is a direct replacement for the EN1241-60.



Smoke Detector

The **EN1244-60** features an onboard sounder, an LED indicator, tamper, EchoStream® network supervision, and local test capability.



CO Detector

The **EN1245-60** features an onboard sounder, a CO sensor, LED indicators and local test capability to allow the user total visibility of its functionality.



*E-call system providers must achieve system certification from a nationally recognized testing laboratory to claim compliance with UL 2560, The Standard for Safety for Assisted Living and Independent Living Facilities.

Non-UL 2560 Components

Transmitters and repeaters shown here feature a three minute check-in interval and are therefore not allowed for use in UL 2560 installations.

One-Way RF Modules

RF modules can be integrated into a device for applications such as call notification and any switch or alarm condition.

One-Way Binary
EN1941-60

One-Way Serial Data
EN1941XS



Waterproof Pendant with Wristband

Water-resistant pendant with single button press and hold activation. Includes plastic neck chain and belt clip.

Single Button
EN1235-60

Wrist straps
ACC6235 - Small
ACC623L - Large



Multiple Condition Pendants

Multiple condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality.

Four Condition **EN1224**

Four Condition
On/Off **EN1224-ON**



Three Condition Pendant

Multiple condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality.

Three Condition **EN1236D**



Universal Transmitters

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch.

Universal Transmitter **EN1210**

With EOL Resistor
EN1210EOL

Door/Window Transmitter with Reed Switch
EN1210W



Universal Transmitters with Wall Tamper

Wall tamper switch adds protection from device removal.

Universal Transmitter with Wall Tamper **EN1215EOL**

With Reed Switch and Magnet **EN1215WEOL**



Dual Input Universal

Dual input universal transmitters can be used with any standard N/O or N/C sensor and include an additional N/C input.

Dual Input Universal Transmitter **EN1212**

With Wall Tamper **EN1216**



Long Range Universal

The **EN1252** long range dual input universal transmitter provides five times the power of a standard Inovonics universal transmitter allowing for use in remotely located buildings.

Long Range Universal Transmitter
EN1252



Smoke Detector

The **EN1244** features an onboard sounder, an LED indicator, tamper, EchoStream® network supervision, and local test capability.



CO Detector

The **EN1245** features an onboard sounder, a CO sensor, LED indicators and local test capability to allow the user total visibility of its functionality.



360° Ceiling Mount Motion Detector

The **EN1265** four element motion detector offers a 360° coverage pattern, case tamper switch, and up to an 18ft mounting height with the included lens.

High Ceiling Lens (25ft)
ACC669



360° Ceiling Mount Motion Detector

The **EN1266** 360° ceiling mount motion detector is a four element passive infrared intrusion detector for use in electronic security systems in ceiling mount applications.

This is a direct replacement for the EN1265.



Motion Detector with Pet Immunity

The **EN1262** is designed for low traffic applications and features pet immunity to reduce false alarms from animals. Includes a case tamper switch and optional wall tamper.



Wall Mount Motion Detector with Pet Immunity

The **EN1263** motion detector with pet immunity is an advanced, fully supervised low-current wireless motion detector with the most advanced optics detection method for reliable system operation.

This is a direct replacement for the EN1260/EN1262.



Wall Mount Motion Detector

The **EN1260** features digital signal processing that recognizes human signatures to reduce false alarms.

Curtain Lens Kit
ACC672CT

Long Range Lens Kit (99ft) **ACC672CT**

Pet Alley Lens Kit
ACC672PA



Universal Serial Receivers

The **EN4000** universal serial receiver is a wireless gateway between EchoStream one-way transmitters and a software application using an RS-232 serial interface.



High Power Repeater

The high power repeater amplifies transmissions from any transmitter

High Power Repeater with Transformer
EN5040-T

Without Transformer
EN5040

Waterproof Enclosure
ACC650



Glassbreak Detector

The **EN1248** glassbreak detector is a wireless omnidirectional glassbreak detector, providing detection coverage of 180°.

This is a direct replacement for the EN1247.



Add-On Receivers

Add-on receivers cost effectively add EchoStream wireless transmitters to any installation. Includes form C relays with dedicated alarm and fault output. The **EN4216MR** and **EN4232MR** are UL listed, support multi-condition transmitters, and include event logging.

Receiver	Transmitters	Outputs
EN4204R	4	4 Alarm / 1 Fault
EN4216MR	16	5 Alarm / 1 Fault
EN4232MR	32	11 Alarm / 1 Fault



Survey Receiver

The **EN4016SK** survey receiver is a portable and easy to use tool for determining the optimal location for transmitters and repeaters. Reduce bid risk, decrease installation time, and build credibility with clients.



Survey Transmitters

Survey transmitters are used with the EN4016SK survey receiver to help determine optimal location for transmitters and repeaters.

Survey Universal
EN1210SK

Survey Pendant
EN1223SK



Survey Kit & App

The **EN7017** survey kit and app reduces bid risk, decreases installation time, and builds credibility with clients. Quickly prepare accurate quotes for even the most complex jobs.

Mobile app available on Android and iOS devices.



The range and performance of any wireless product depends on the structure and environment in which it operates. Continual enhancements to our products may cause specifications to change without notice. Visit our website for UL information.