

EN1216 Dual Input Universal Transmitter with Wall Tamper


The Inovonics dual input universal transmitter with wall tamper is designed for use with any standard contact or sensor that provides a contact closure. The primary alarm input is selectable – normally open or closed – and the secondary alarm input is set to normally closed only. It is fully supervised and includes a wall tamper switch that notifies the system when the transmitter is removed from its mounted surface.

Product Features

 Supports dual inputs

 Screw closure housing and wall tamper switch proved additional security

 Can be used with almost any standard NO/NC contact

Product Specifications

Weight:	3 oz
---------	------

Typical battery life:	3 – 5 years
-----------------------	-------------

Internal battery type:	Panasonic CR123A
------------------------	------------------

External contacts:	Input one can be normally open or normally closed; input two is always normally closed
--------------------	--

External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
--	--

Distance, external contact to transmitter:	10 feet maximum
--	-----------------

 Operating environment:

Temperature:	-4 to 140°F
--------------	-------------

Humidity:	Up to 90% (non-condensing)
-----------	----------------------------


Market:	North America, Australia, New Zealand
---------	---------------------------------------

EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
------------------------	--


Check-in time frequency:	3 minutes
--------------------------	-----------

Regulatory compliance:	FCC, RoHS, Industry Canada
------------------------	----------------------------

Inputs

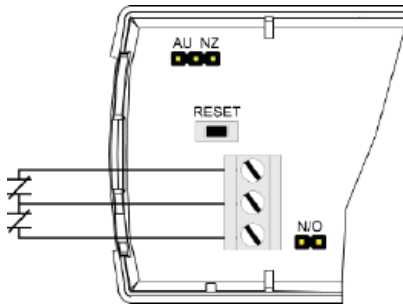


Both inputs normally closed

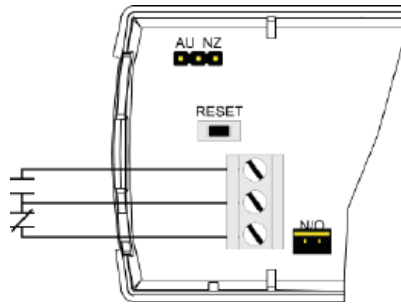

Input one normally open

Dimensions

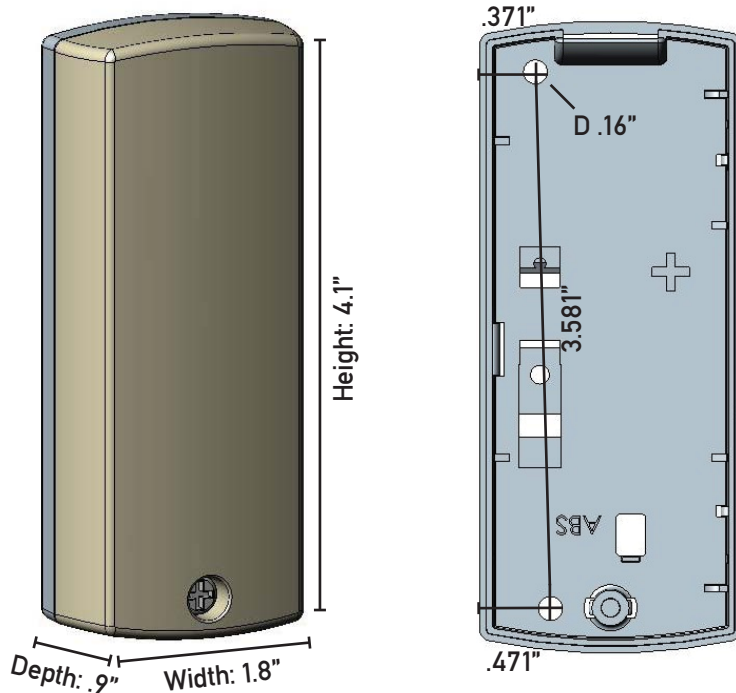

Reference Materials (available at www.inovonics.com)

EN1216 EchoStream Universal Dual Input Transmitter with Wall Tamper Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

