



The EN1751 water detector provides affordable early warning against damage caused by leaking appliances and standing water when used with the Honeywell® FP280 or Flair Electronics® 1010-H2OS36-EN1751 probe, sold separately.

Product Features

- Alarms upon detection of 1/4" non distilled water
- Tampers if probe wire is cut or disconnected
- Fully supervised, with a 60-minute check-in interval

Product Specifications


Weight:	1.9 oz.
Typical battery life:	8 years at a 5 minute transmission interval
Internal battery type:	Panasonic CR123A
Operating environment:	
Temperature:	-4 to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	60 minutes
Regulatory compliance:	FCC, RoHS

Mounting bracket




The mounting bracket hinges to the transmitter. Just mount the bracket and snap the transmitter in place.

Inputs

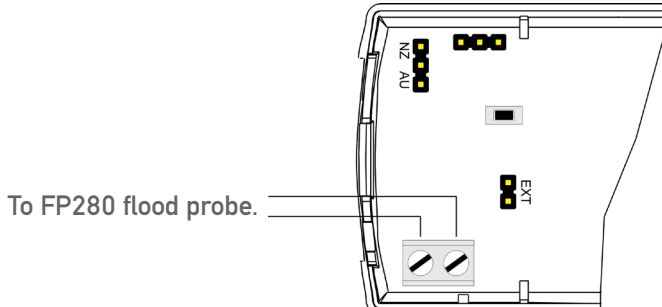

Dimensions

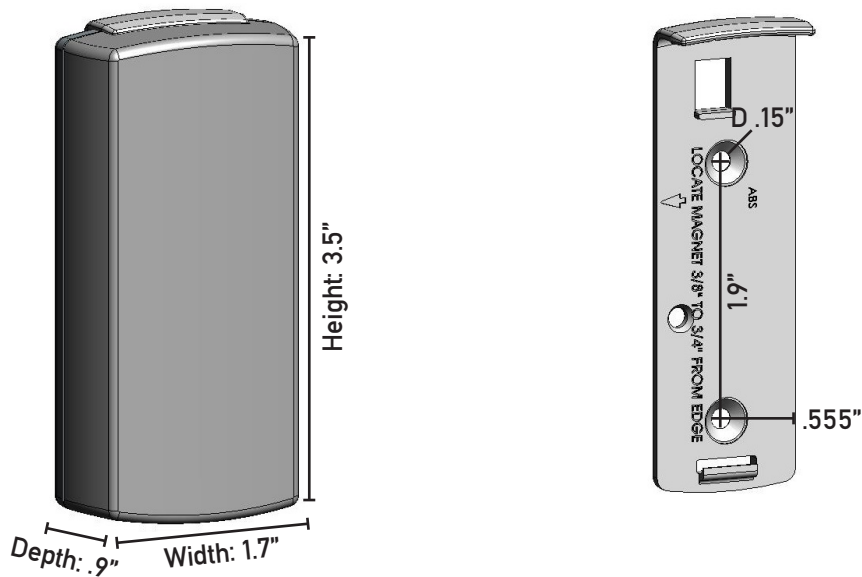

Reference Materials (available at www.inovonics.com)

[EN1751 Water Detector Installation Instructions](#)

[EchoStream Developer Guide](#)

[Inovonics Product Catalog: North America](#)

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.